

**SZ1215 Cable Pull**

**Main Features**


- Suitable for customized installation of analog or digital encoders of 58 mm diameter.
- Resolution: depending on the encoder
- Easy installation
- Rugged aluminum housing
- High noise immunity
- Customized special designs available

**Electrical date**

Potentiometric output	1 kΩ (Other values on request)
Analog output	0 ... .10 V or 4 .... 20 mA
Resolution	Depending on the encoder

**Technical date - Mechanical data**

Measuring range	0 to 15000 mm(SZ1215-M) 0 to 15000 mm(SZ1215-A)
Linearity	+ / - 0.05% of ultimate value
Circumference of micrometer drum	300 mm / revolution
Acceleration	4 M/S <sup>2</sup>
Spring return	15N/25N
Measuring wire diameter	1 mm
Speed of adjustment	5m/s
Reproducibility	equal to resolution
Casing material	Aluminium 2017A
Material of measuring wire	Stainless steel 316L
IP code of casing	IP67(SZ1215-M) IP65(SZ1215-A)
Operating temperature	-20°C to +80°C
Storage temperature	-40°C to +80°C
Lifetime	100 000 cycles

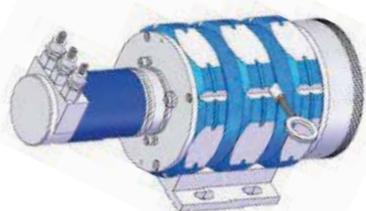

### Compact sensor for industrial use

The cable control sensor of the series SZ1215-A is ideal for the measurement of linear movements and positioning in industrial applications. The compact design allows an easy assembly. The robust aluminum housing in combined with our high production quality enables an accurate measurement even at hardly accessible measuring points

Order code (6 mm shaft diameter): SZ1215-M-15000-6

Order code (10 mm shaft diameter): SZ1215-M-15000-10

#### SZ1215-analog

